


## TRANSISTOR (NPN)

### FEATURE

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC807 (PNP)

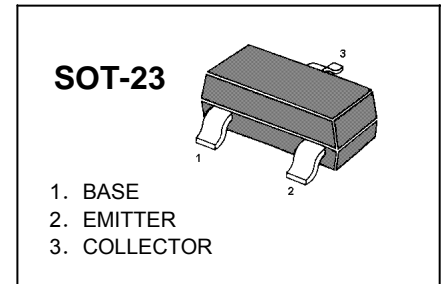

### MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
$V_{CB0}$	Collector-Base Voltage	50	V
$V_{CE0}$	Collector-Emitter Voltage	45	V
$V_{EB0}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	0.5	A
$P_C$	Collector Power Dissipation	0.3	W
$T_j$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-55-150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{CB0}$	$I_C = 10\mu\text{A}$ , $I_E = 0$	50		V
Collector-emitter breakdown voltage	$V_{CE0}$	$I_C = 10\text{mA}$ , $I_B = 0$	45		V
Emitter-base breakdown voltage	$V_{EB0}$	$I_E = 1\mu\text{A}$ , $I_C = 0$	5		V
Collector cut-off current	$I_{CB0}$	$V_{CB} = 45\text{V}$ , $I_E = 0$		0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EB0}$	$V_{EB} = 4\text{V}$ , $I_C = 0$		0.1	$\mu\text{A}$
DC current gain	$h_{FE(1)}$	$V_{CE} = 1\text{V}$ , $I_C = 100\text{mA}$	100	600	
	$h_{FE(2)}$	$V_{CE} = 1\text{V}$ , $I_C = 500\text{mA}$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500\text{mA}$ , $I_B = 50\text{mA}$		0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 500\text{mA}$ , $I_B = 50\text{mA}$		1.2	V
Base-emitter voltage	$V_{BE}$	$V_{CE} = 1\text{V}$ , $I_C = 500\text{mA}$		1.2	V
Collector capacitance	$C_{ob}$	$V_{CB} = 10\text{V}$ , $f = 1\text{MHz}$		10	pF
Transition frequency	$f_T$	$V_{CE} = 5\text{V}$ , $I_C = 10\text{mA}$ $f = 100\text{MHz}$	100		MHz

### CLASSIFICATION OF $h_{FE(1)}$


Rank	BC817-16	BC817-25	BC817-40
Range	100-250	160-400	250-600
Marking	6A	6B	6C

## Typical Characteristics


**Typical Pulsed Current Gain vs Collector Current**

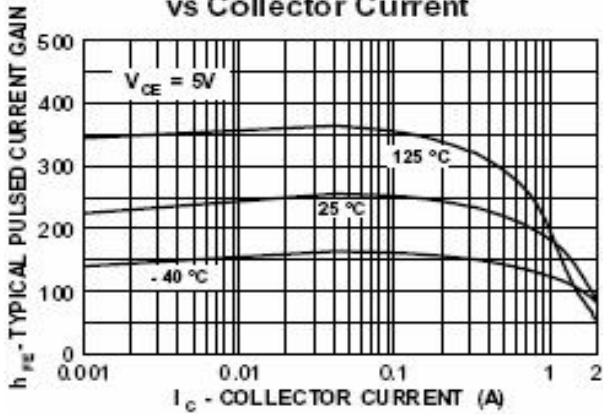


**Collector-Emitter Saturation Voltage vs Collector Current**

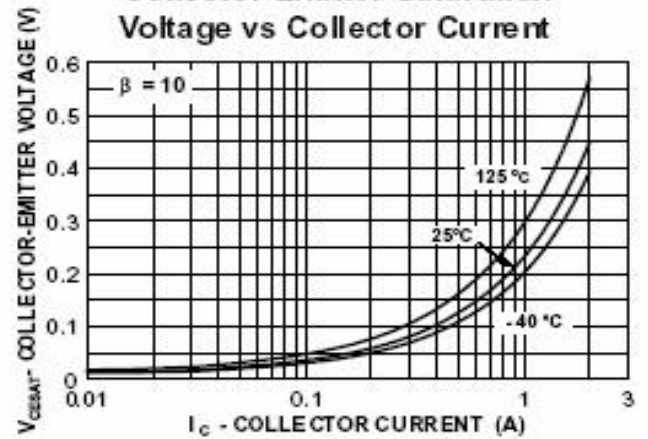


**Base-Emitter Saturation Voltage vs Collector Current**

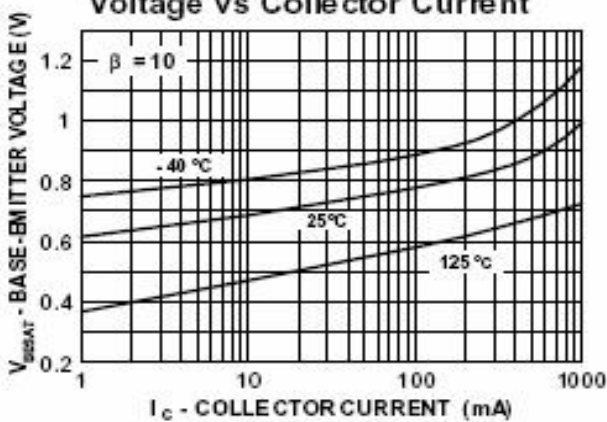

**Base-Emitter ON Voltage vs Collector Current**

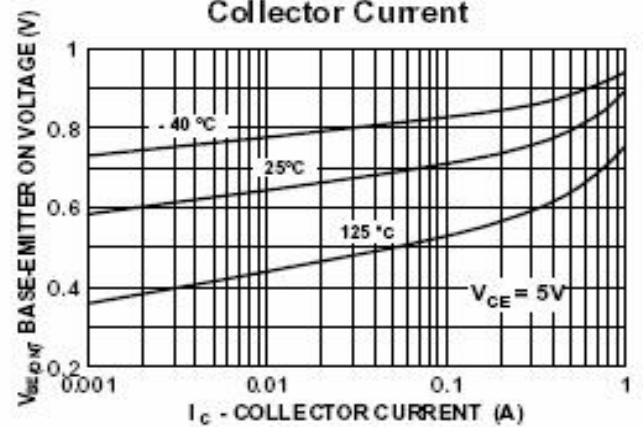

**Collector-Cutoff Current vs Ambient Temperature**

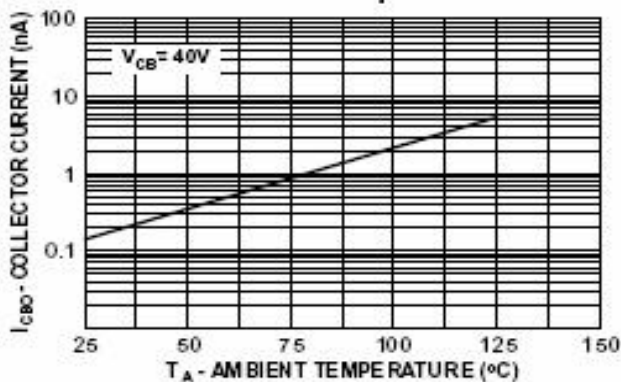

**Collector-Base Capacitance vs Collector-Base Voltage**

