



SILICON PLANAR ZENER DIODES

Features

- Zener breakdown voltage range - 2.4 V to 75 V
- Package designed for optimal automated board assembly
- Small package size for high density applications



1. Cathode 2. Cathode 3. Anode
SOT-23 Plastic Package

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	350	mW
Thermal Resistance, Junction to Ambient ¹⁾	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature Range	T_j, T_S	- 65 to + 150	$^\circ\text{C}$

¹⁾ Alumina = 0.4 X 0.3 X 0.024 in, 99.5% alumina

Characteristics at $T_a = 25\text{ }^\circ\text{C}$


Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	V_F	0.9	V

Electrical Characteristics ($T_a = 25\text{ °C}$ unless otherwise noted)


Type	Marking Code	Zener Voltage Range ¹⁾				Dynamic Resistance		Reverse Leakage Current	
		V _Z			at I _{ZT}	Z _{ZT}	at I _{ZT}	I _R	at V _R
		Nom. (V)	Min. (V)	Max. (V)	mA	Max. (Ω)	mA	Max. (μA)	V
BZX84B2V4CA	A31	2.4	2.35	2.45	5	100	5	50	1
BZX84B2V7CA	B31	2.7	2.65	2.75	5	100	5	20	1
BZX84B3V0CA	C31	3	2.94	3.06	5	95	5	10	1
BZX84B3V3CA	D31	3.3	3.23	3.37	5	95	5	5	1
BZX84B3V6CA	EW	3.6	3.53	3.67	5	90	5	5	1
BZX84B3V9CA	E31	3.9	3.82	3.98	5	90	5	3	1
BZX84B4V3CA	F31	4.3	4.21	4.39	5	90	5	3	1
BZX84B4V7CA	G31	4.7	4.61	4.79	5	80	5	3	2
BZX84B5V1CA	H31	5.1	5	5.2	5	60	5	2	2
BZX84B5V6CA	J31	5.6	5.49	5.71	5	40	5	1	2
BZX84B6V2CA	K31	6.2	6.08	6.32	5	10	5	3	4
BZX84B6V8CA	L31	6.8	6.66	6.94	5	15	5	2	4
BZX84B7V5CA	N31	7.5	7.35	7.65	5	15	5	1	5
BZX84B8V2CA	M31	8.2	8.04	8.36	5	15	5	0.7	5
BZX84B9V1CA	P31	9.1	8.92	9.28	5	15	5	0.5	6
BZX84B10CA	Q31	10	9.8	10.2	5	20	5	0.2	7
BZX84B11CA	R31	11	10.78	11.22	5	20	5	0.1	8
BZX84B12CA	S31	12	11.76	12.24	5	25	5	0.1	8
BZX84B13CA	T31	13	12.74	13.26	5	30	5	0.1	8
BZX84B15CA	U31	15	14.7	15.3	5	30	5	0.05	10.5
BZX84B16CA	V31	16	15.68	16.32	5	40	5	0.05	11.2
BZX84B18CA	W31	18	17.64	18.36	5	45	5	0.05	12.6
BZX84B20CA	X31	20	19.6	20.4	5	55	5	0.05	14
BZX84B22CA	Y31	22	21.56	22.44	5	55	5	0.05	15.4
BZX84B24CA	Z31	24	23.52	24.48	5	70	5	0.05	16.8
BZX84B27CA	A41	27	26.46	27.54	2	80	2	0.05	18.9
BZX84B30CA	B41	30	29.4	30.6	2	80	2	0.05	21
BZX84B33CA	C41	33	32.34	33.66	2	80	2	0.05	23.1
BZX84B36CA	D41	36	35.28	36.72	2	90	2	0.05	25.2
BZX84B39CA	E41	39	38.22	39.78	2	130	2	0.05	27.3
BZX84B43CA	F41	43	42.14	43.86	2	150	2	0.05	30.1
BZX84B47CA	G41	47	46.06	47.94	2	170	2	0.05	32.9
BZX84B51CA	H41	51	49.98	52.02	2	180	2	0.05	35.7
BZX84B56CA	J41	56	54.88	57.12	2	200	2	0.05	39.2
BZX84B62CA	K41	62	60.76	63.24	2	215	2	0.05	43.4
BZX84B68CA	L41	68	66.64	69.36	2	240	2	0.05	47.6
BZX84B75CA	M41	75	73.5	76.5	2	255	2	0.05	52.5

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.


Temperature Coefficient

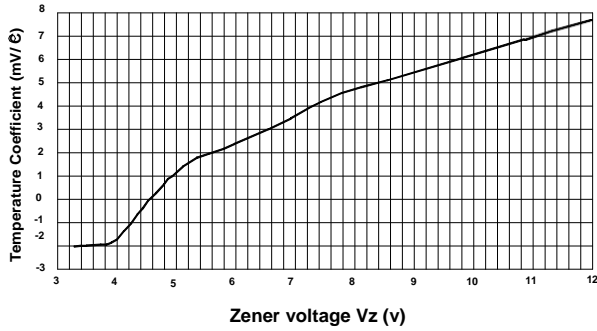



Temperature Coefficient

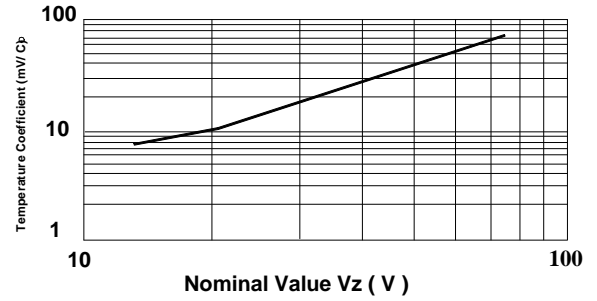

Power Derating Curve

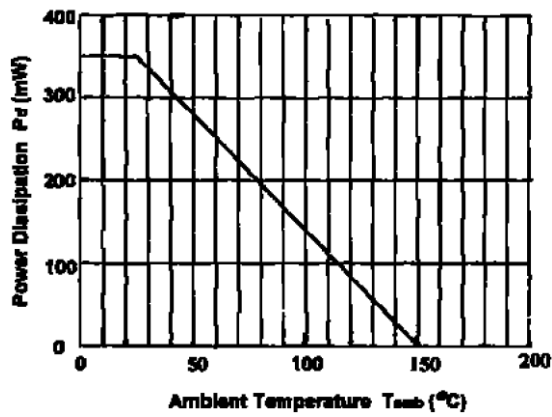

Typical Forward Voltage

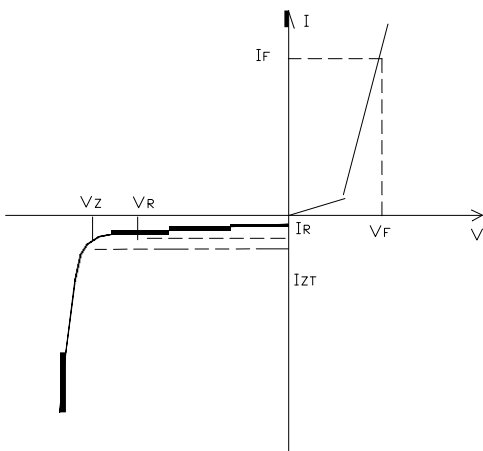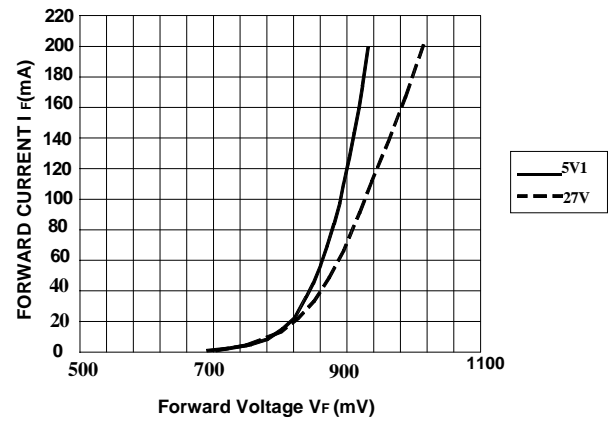

Zener Voltage Regulator